

## SM7336-TR1

Infrared Remote-control Receiver Module  
36kHz Carrier Frequency


Luckylight

### Technical Data Sheet

---

#### Features

- External dimensions 6.80 (L) × 3.00 (W) × 3.20 (H) mm.
- Wide operating supply voltage 2.7 - 5.5V.
- Low current consumption (Typ. 500μA @3V).
- Maximum interference safety against VCC noise & light noise.
- No external components necessary.
- Internal filter for a high frequency lighting fluorescent lamp.
- Output active low.
- High ESD level up to 12KV for HBM.
- Carrier frequency 36kHz.
- Compliance with EU REACH.
- The product itself will remain within RoHS compliant Version.

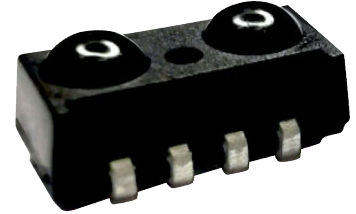

#### Descriptions

- The device is a miniature SMD type infrared remote control system receiver that has been developed and designed by utilizing the most updated IC technology.
- The PIN diode and preamplifier are assembled on PCB, the epoxy package is designed as an IR filter.
- The demodulated output signal can directly be decoded by a microprocessor.
- The SM7336-TR1 is the standard IR remote control receiver series, supporting all major transmission codes.

#### Applications

- Infrared applied system.
- Light detecting portion of remote control.
- AV instruments such as Audio, TV, VCR, CD, MD, etc.
- CATV set top boxes.
- The other equipments with wireless remote control.
- Home appliances such as Air-conditioner, Fan, etc.
- Multi-media Equipment.

# SM7336-TR1


Infrared Remote-control Receiver Module  
36kHz Carrier Frequency

## Technical Data Sheet

### Device Selection Guide

Part No.	Carrier Frequency
SM7336-TR1	36kHz

### Package Dimension

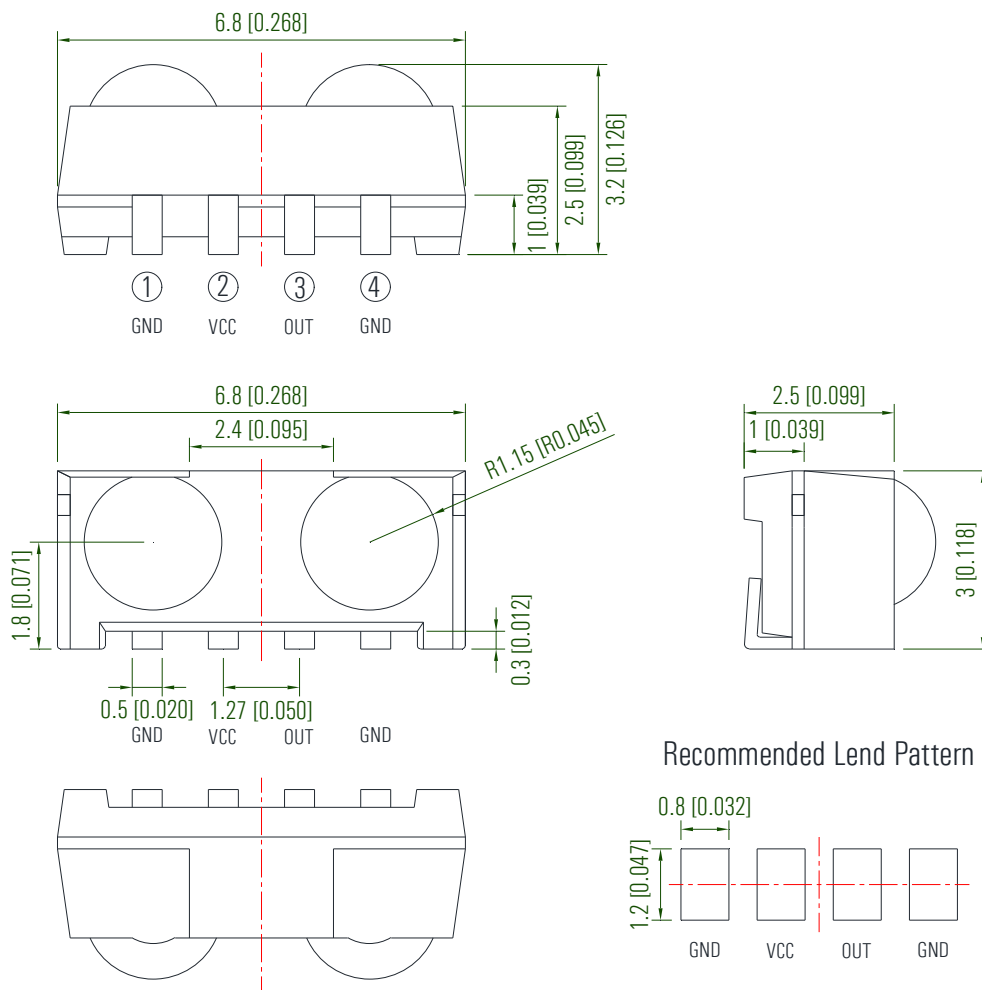

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.3\text{mm}$  (.012") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

## Technical Data Sheet

Absolute Maximum Ratings at  $T_A = 25^\circ\text{C}$ 

Parameters	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	6.00	V
Supply Current	$I_{CC}$	2.50	mA
Operating Temperature	$T_{OPR}$	-20~ + 80	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-40~ + 85	$^\circ\text{C}$
Soldering Temperature	$T_{SOL}$	260 $^\circ\text{C}$ for 5 Seconds	$^\circ\text{C}$

Electrical Optical Characteristics  $T_A = 25^\circ\text{C}$ 

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test condition
DC Supply Voltage	$V_{CC}$	2.70	---	5.50	V	
Supply Current	$I_{CC}$	---	---	0.6	mA	$V_{CC}=5V$ No signal input
		---	---	0.3		$V_{CC}=3V$
B.P.F Center Frequency	$F_o$	---	36	---	KHz	
Peak Wavelength	$\lambda_p$	---	940	---	nm	
Reception Distance	$L_0$	20	---	---	m	
	$L_{45}$	10	---	---		At the ray axis*1
Half Angle (Horizontal)	$\theta_h$	---	45	---	Deg	
Half Angle (Vertical)	$\theta_v$	---	45	---		
High Level Pulse Width	$T_H$	400	---	800	$\mu\text{s}$	At the ray axis*2
Low Level Pulse Width	$T_L$	400	---	800		
High Level Output Voltage	$V_H$	4.70	---	---	V	$V_{CC}=5V$
		2.70	---	---		$V_{CC}=3V$
Low Level Output Voltage	$V_L$	---	---	0.30	V	

## Notes:

- The ray receiving surface at a vertex and relation to the ray axis in the range of  $\theta=0^\circ$  and  $\theta=45^\circ$ .
- A range from 30cm to the arrival distance. Average value of 50 pulses.


# SM7336-TR1

Infrared Remote-control Receiver Module  
36kHz Carrier Frequency




## Technical Data Sheet

### Function Block Diagram

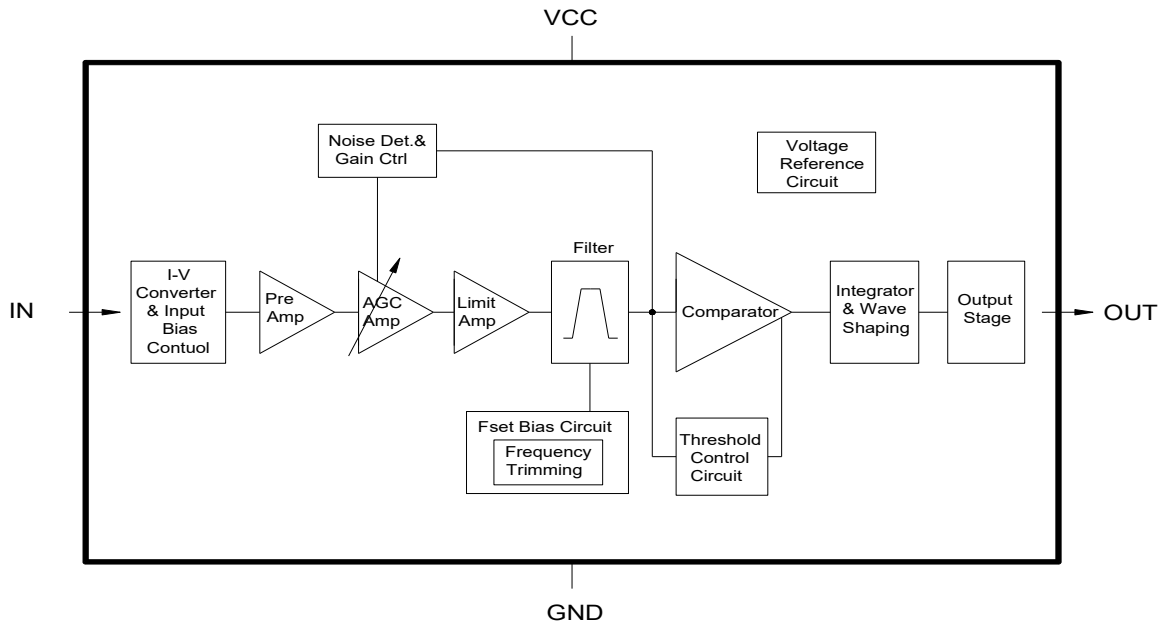


### Test Method


A. Standard Transmitter

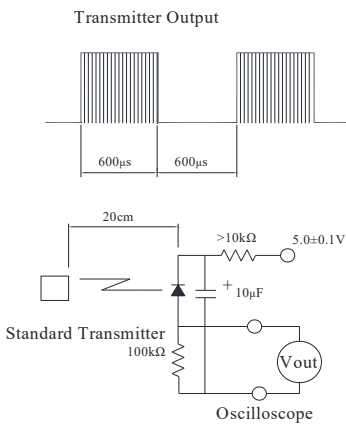


B. Detection Length Test

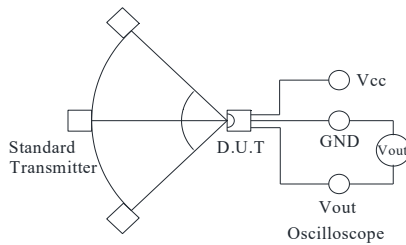

C. Pulse Width Test

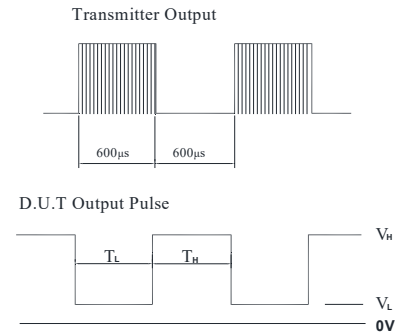

### Application Circuit

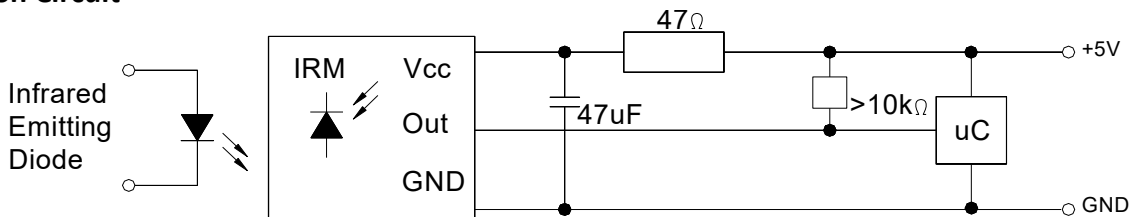

**Technical Data Sheet**

**Typical Electrical/Optical Characteristic Curves at TA = 25°C**

Fig.1 Relative Spectral Sensitivity vs. Wavelength

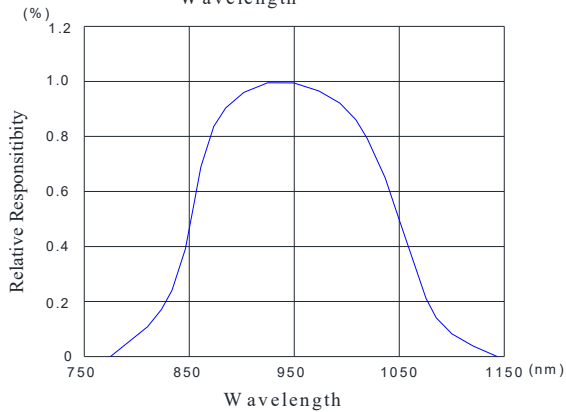


Fig.2 Relative Transmission Distance Vs. Direction

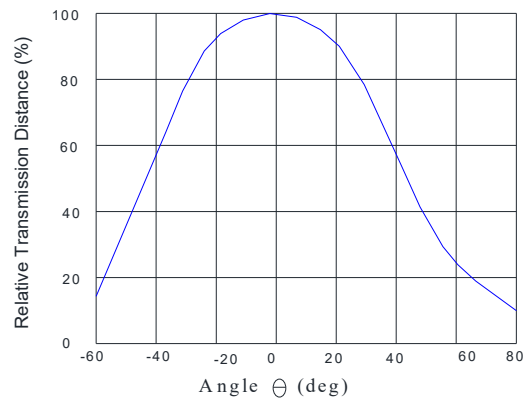


Fig.3 Frequency Dependence of Responsivity

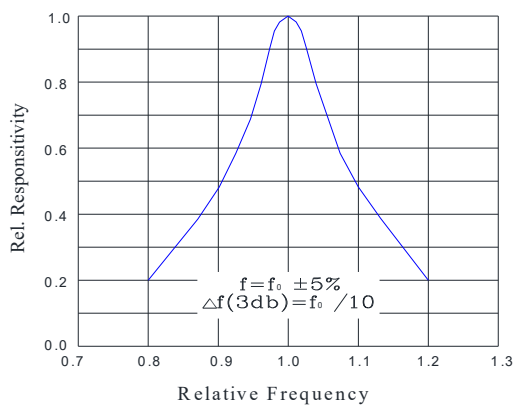


Fig.4 Supply Current vs. Ambient Temperature


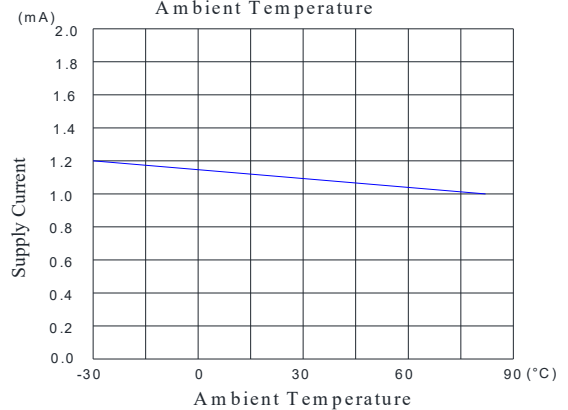


Fig.5 Relative Transmission Distance vs. Direction

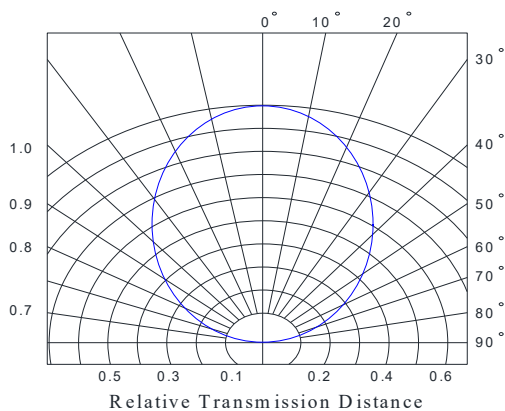

## SM7336-TR1

Infrared Remote-control Receiver Module  
36kHz Carrier Frequency

### Technical Data Sheet

---

#### Acceptable Code List

Data format	Code acceptable
NEC	O
RC5_Philips	O
RC6_Philips	O
Toshiba	O


# SM7336-TR1

Infrared Remote-control Receiver Module  
36kHz Carrier Frequency



## Technical Data Sheet

### Taping and Reel Dimensions in Millimeters

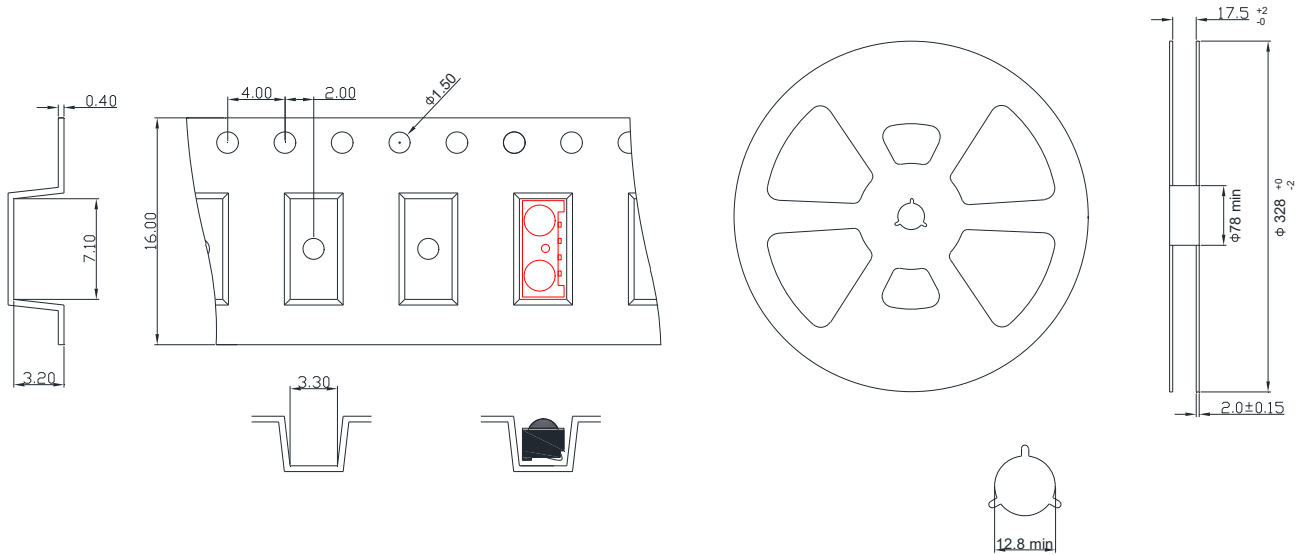

#### Notes:

1. 2500PCS per reel.


# SM7336-TR1

Infrared Remote-control Receiver Module  
36kHz Carrier Frequency



## Technical Data Sheet

### Packing & Label Specifications

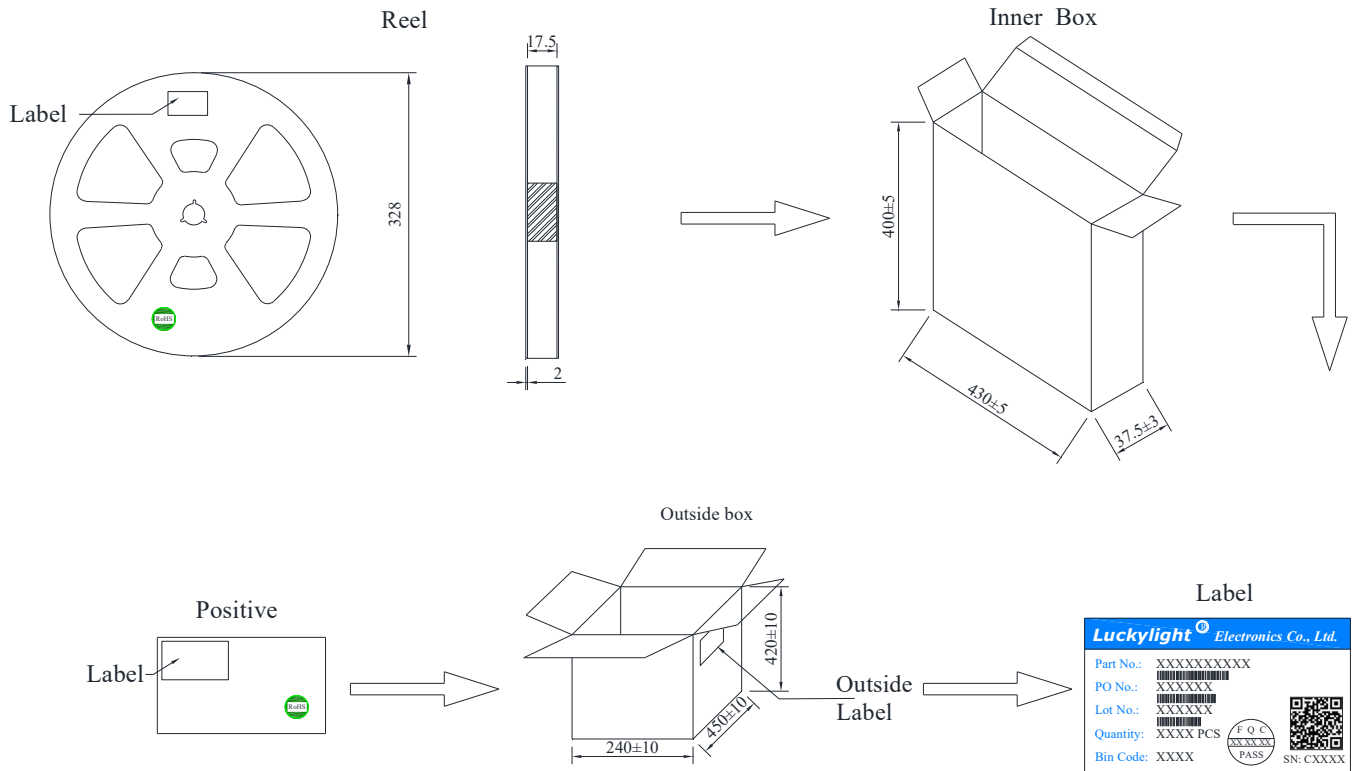

### Notes:

1 2500PCS per reel, 2 reels per box, 6 boxes per carton.



**Technical Data Sheet**

---

**CAUTIONS****1. Over-current-proof**

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

**2. Storage**

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the Infrared Receiver Module should be kept at 30°C or less and 90%RH or less.

2.3 The Infrared Receiver Module should be used within a year.


2.4 After opening the package, the Infrared Receiver Module should be kept at 30°C or less and 70%RH or less.

2.5 The Infrared Receiver Module should be used within 168 hours (7 days) after opening the package.

2.6 If the moisture adsorbent material (silica gel) has fabled away or the Infrared Receiver Module have exceeded the storage time, baking treatment should be performed using the following conditions: Baking treatment:  
60±5°C for 24 hours.

**3. Soldering Condition**

3.1 Pb-free solder temperature profile.

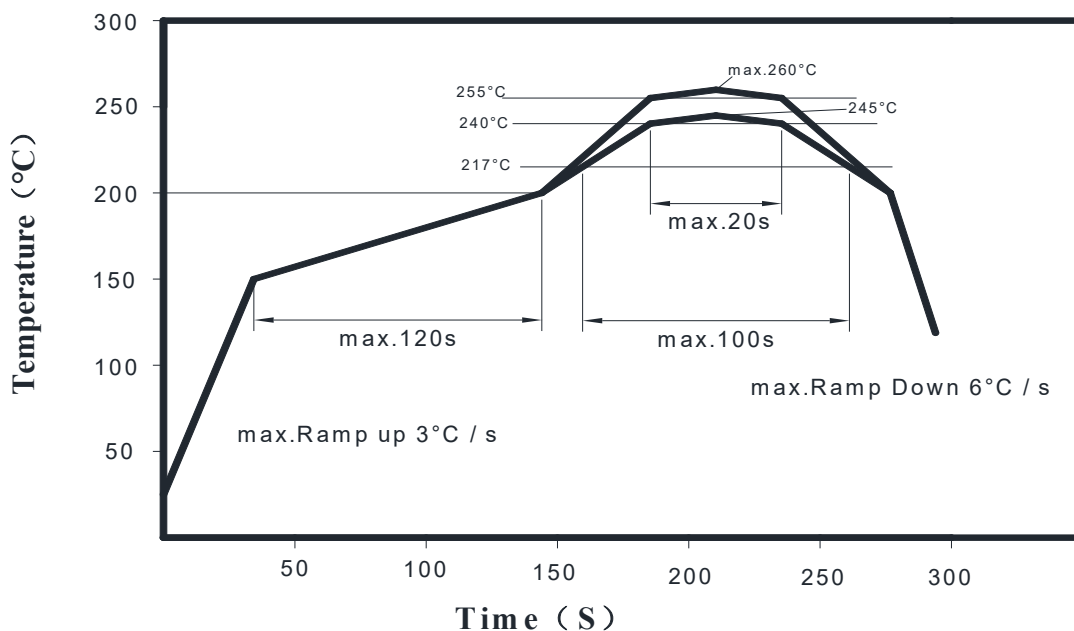

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the Infrared Receiver Module during heating.

3.4 After soldering, do not warp the circuit board.

## SM7336-TR1

### Infrared Remote-control Receiver Module

36kHz Carrier Frequency

## Technical Data Sheet


---

### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260°C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5. Repairing

Repair should not be done after the Infrared Receiver Module have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the Infrared Receiver Module will or will not be damaged by repairing.

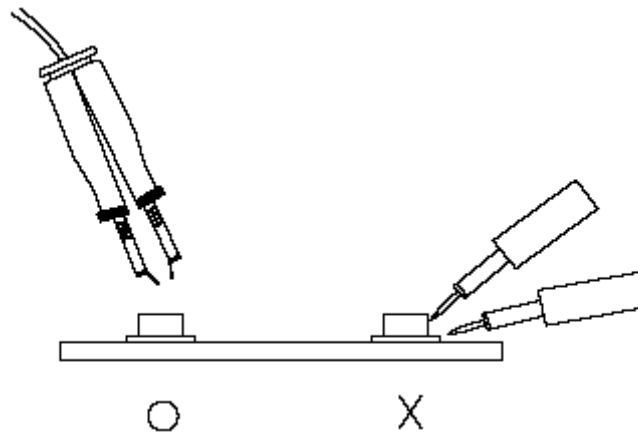

### 6. Caution in ESD

Static Electricity and surge damages the Infrared Receiver Module. It is recommended to use a wrist band or anti-electrostatic glove when handling the Infrared Receiver Module. All devices, equipment and machinery must be properly grounded.