

KW1-603ARD

0.6inch (15.24mm) Red 7-Segment Single Digit LED Displays

0.6inch (15.24mm) Red Through-hole 7-segment LED Displays

Technical Data Sheet

Features

- High reliability
- Low power consumption
- Excellent characters appearance
- Evenly lighted segments
- Wide viewing angle
- Easy mounting on PCB or sockets
- I.C. compatible
- RoHS compliant



Descriptions

The KW1-603ARD is a 0.6inch (15.24mm) red through-hole single digit LED display. It features red diffused segments and a black surface. This display is designed for indoor use and is suitable for a wide variety of applications, including electronic signs, industrial equipment, and consumer electronics. Also known as 0.6inch (15.24mm) red through-hole single digit LED numeric displays.

This 0.6inch (15.24mm) through-hole seven segment LED display features industry standard package dimensions and pinout. The device is available in common anode or common cathode configurations. Color options include red, green, blue, orange and more.

Applications

- Home and smart appliances
- Instrument panels
- Display time and digital combination
- Test and measurement equipment
- Control units

Device Selection Guide

Part No.	Emitting Color	Circuit Common
KW1-603ARD	Red	Common Anode


KW1-603ARD

0.6inch (15.24mm) Red 7-Segment Single Digit LED Displays

0.6inch (15.24mm) Red Through-hole 7-segment LED Displays

Technical Data Sheet

Package Dimension

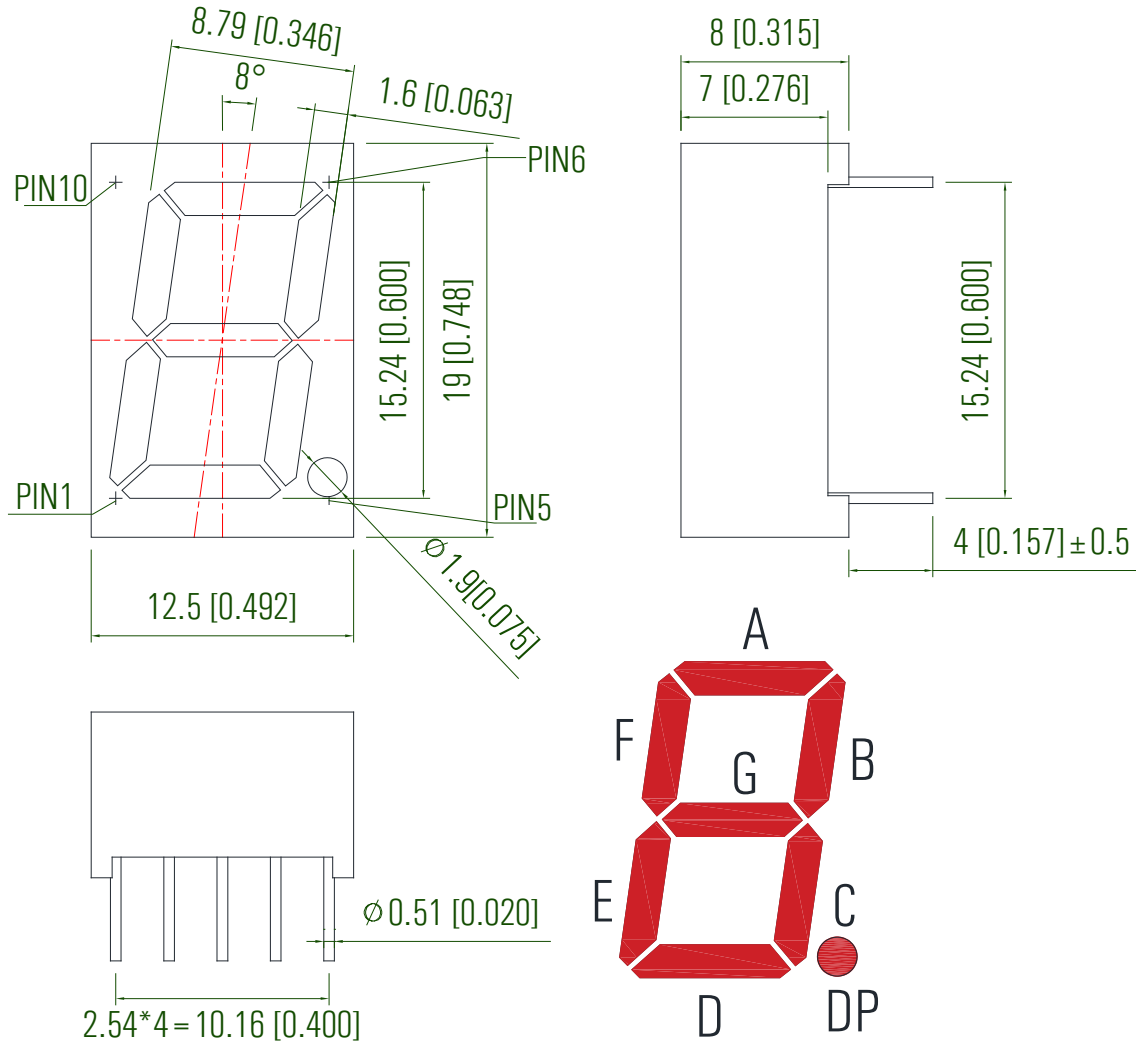

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.


KW1-603ARD

0.6inch (15.24mm) Red 7-Segment Single Digit LED Displays


0.6inch (15.24mm) Red Through-hole 7-segment LED Displays

Technical Data Sheet

Internal Circuit Diagram:

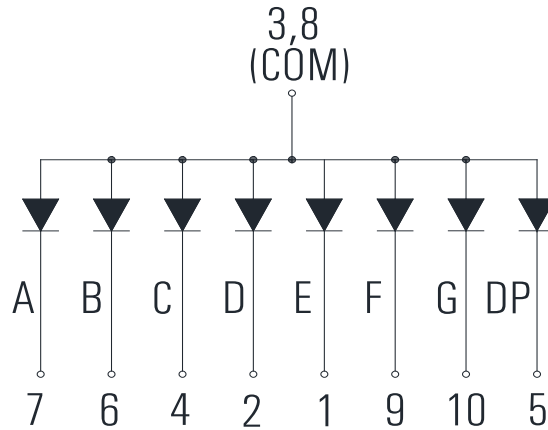

Recommended PCB Layout:

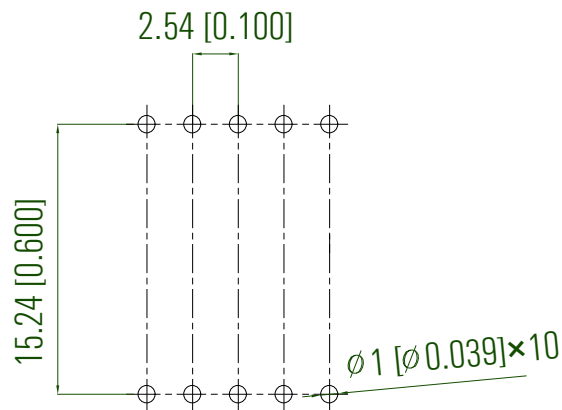

Technical Data Sheet

Absolute Maximum Ratings at Ta=25°C

Parameters	Symbol	Max	Unit
Power Dissipation (Per Chip)	P_d	48	mW
Peak Forward Current (Per Segment) (1/10 Duty Cycle, 0.1ms pulse width)	I_{FP}	40	mA
Forward Current (Per Segment)	I_F	20	mA
Reverse Voltage (Per Chip)	V_R	5	V
Operating Temperature Range	T_{opr}	-40°C to +80°C	
Storage Temperature Range	T_{stg}	-40°C to +85°C	
Soldering Temperature	T_{sld}	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C





Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Average Luminous Intensity	I_v	5.0	11.0	---	mcd	IF=5mA (Note a)
		8.0	18.0	---	mcd	IF=10mA (Note a)
Luminous Intensity Matching Ratio	I_{v-m}	---	---	2:1		IF=20mA
Peak Emission Wavelength	λ_p	---	645	---	nm	IF=20mA
Dominant Wavelength	λ_d	---	635	---	nm	IF=20mA (Note b)
Spectral Line Half-Width	$\Delta\lambda$	---	20	---	nm	IF=20mA
Forward Voltage (Per Segment)	V_F		2.0	---2.4	V	IF=20mA (Note c)
Reverse Current (Per Segment)	I_R	---	---	50	μ A	VR=5V

Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Technical Data Sheet

Typical Electrical/Optical Characteristics Curves

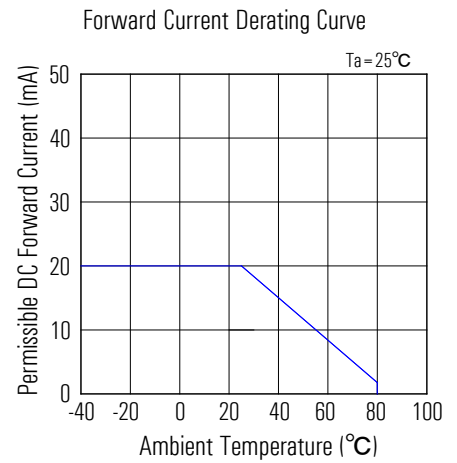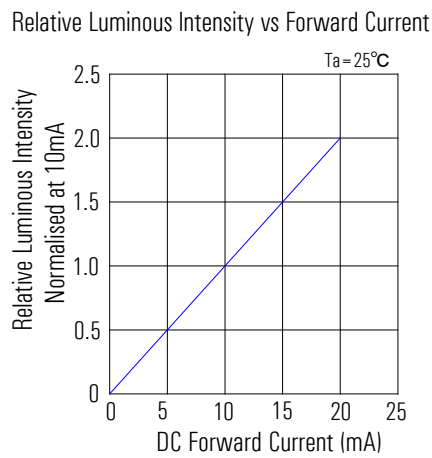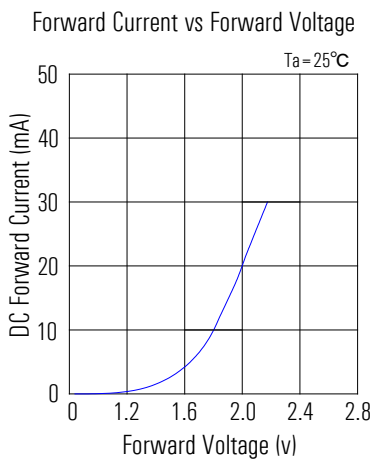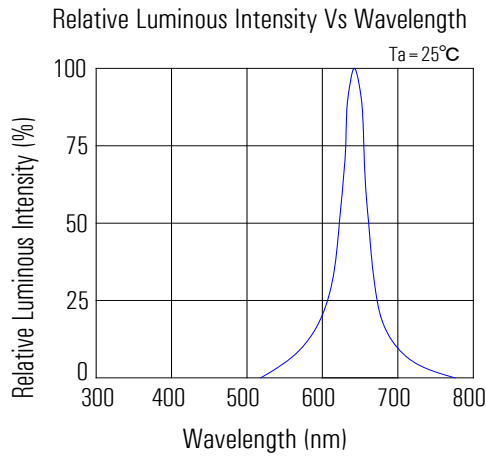

KW1-603ARD


0.6inch (15.24mm) Red 7-Segment Single Digit LED Displays

0.6inch (15.24mm) Red Through-hole 7-segment LED Displays



Technical Data Sheet

Packing & Label Specifications:

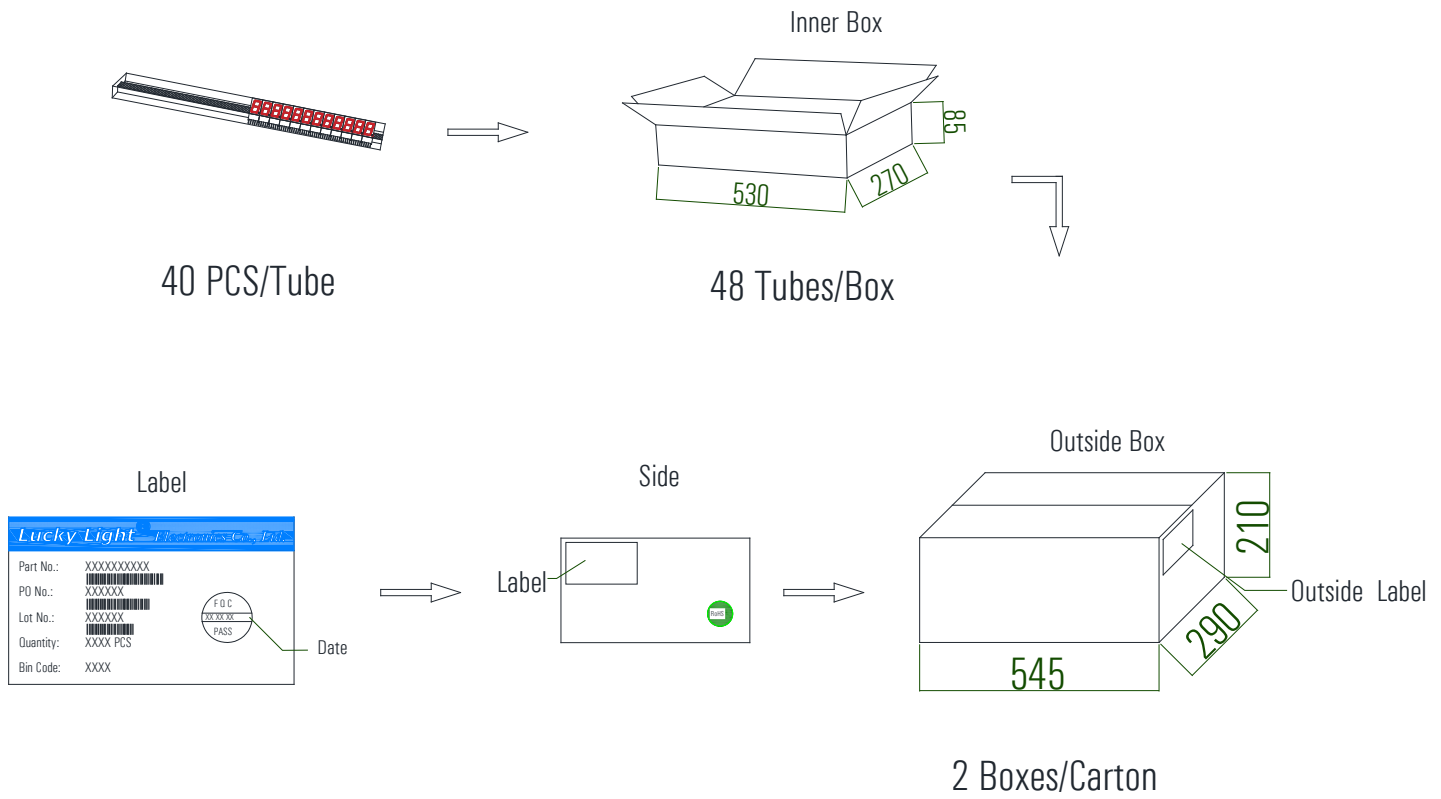



Technical Data Sheet

Terms and conditions for the usage of this document:



- a. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- b. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- c. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
- d. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
- e. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.
- f. Over-current-proof
Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
- g. LED Storage Instructions:
 - 1) Store LEDs at or below 30°C and at or below 80% relative humidity (RH) before opening the package.
 - 2) Use LEDs within one year of purchase.
 - 3) After opening the package, store LEDs at or below 30°C and at or below 60% RH.

Technical Data Sheet**Through Hole Display Mounting Method****Lead Forming:**



1. Do not bend the component leads by hand without proper tools.
2. The leads should be bent by clinching the upper part of the lead firmly such that the bending force is not exerted on the plastic body.

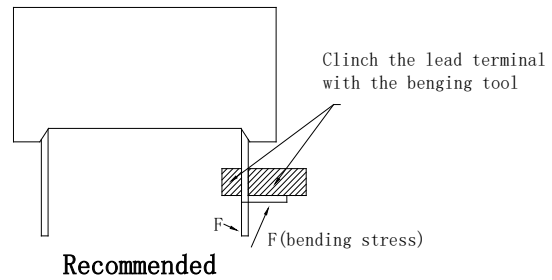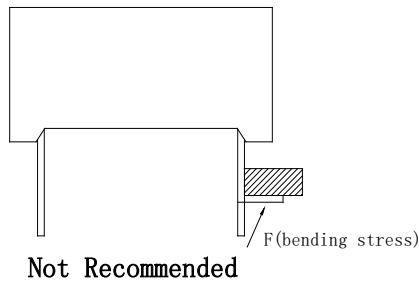
**Installation:**

1. The installation process should not apply stress to the lead terminals.
2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.

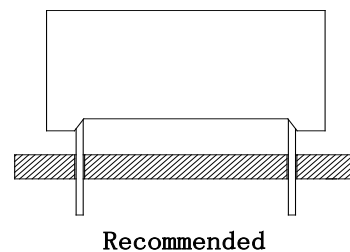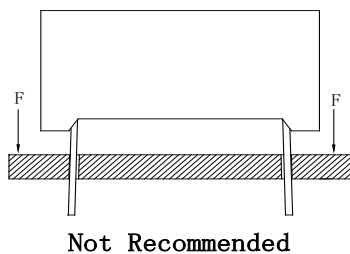

3. The component shall be placed at least 5mm from edge of PCB to avoid damage caused excessive heat during wave soldering.

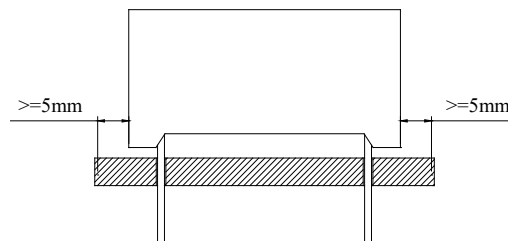

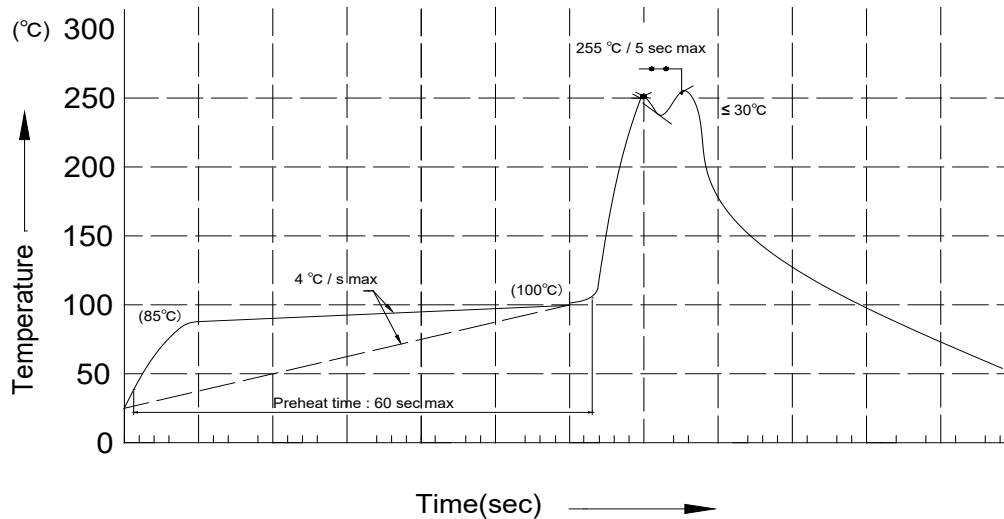Recommended Wave Soldering Profiles**Notes:**

1. Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C.
2. Peak wave soldering temperature between 245°C ~ 255°C for 3 sec (5 sec max).
3. Do not apply stress to the epoxy resin while the temperature is above 85°C.
4. Fixtures should not incur stress on the component when mounting and during soldering process.
5. SAC 305 solder alloy is recommended.
6. No more than one wave soldering pass.
7. During wave soldering, the PCB top-surface temperature should be kept below 105°C.

Soldering General Notes:

1. Through-hole displays are incompatible with reflow soldering.
2. If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with luckyLight for compatibility.


Technical Data Sheet

Cleaning:

1. Mild “no-clean” fluxes are recommended for use in soldering.
2. If cleaning is required, luckylight recommends to wash components with water only.
Do not use harsh organic solvents for cleaning because they may damage the plastic parts.
3. The cleaning process should take place at room temperature and the devices should not be washed for more than one minute.
4. When water is used in the cleaning process, immediately remove excess moisture from the component with forced-air drying afterwards.

Circuit Design Notes:

1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.

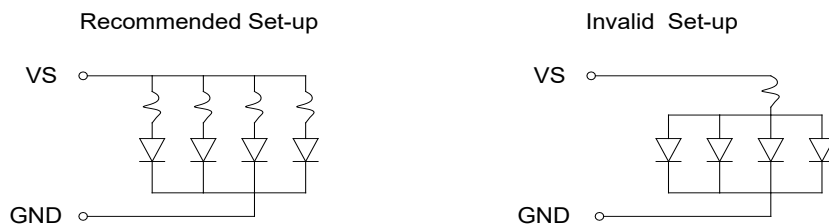

3. The driving circuit should be designed to protect the LED against reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
4. The safe operating current should be chosen after considering the maximum ambient temperature of the operating environment.
5. Prolonged reverse bias should be avoided, as it could cause metal migration, leading to an increase in leakage current or causing a short circuit.

KW1-603ARD

0.6inch (15.24mm) Red 7-Segment Single Digit LED Displays

0.6inch (15.24mm) Red Through-hole 7-segment LED Displays



Technical Data Sheet

Revision History

Page	Subjects	Date	Version
---	Initial Release	16 Apr 2023	Rev-0
4	1. Added brightness data with IF=2mA. 2. Modified data under test conditions with IF=10mA.	2 Aug 2023	Rev-1
4	50 μ A reverse current per segment, modified to 10 μ A	22 Jan 2024	Rev-2
1	Product description modified	28 May 2024	Rev-3