1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Features:

- 1.2 inch (32.0mm) Matrix height
- 5 × 7 dot matrix font
- Low power consumption
- Categorized for luminous intensity
- Choice of colors: Red or Green, etc.
- Choice of face paint colors: Gray or black
- Design flexibility: Common row anode or common row cathode
- RoHS Compliant.

Descriptions:

- The KWM-44571AVB/ KWM-44571CVB is a 1.2 inch (32.0mm) height dot matrix display.
- The display provides excellent reliability in bright ambient light.
- The device is made with white dots and black surface.

Applications:

- Indoor monochromatic display applications, used in variable message signs and static massage panels
- Airport, train and bus station display panels
- Electronic message centers---Stock market, department stores, stadiums, banks and cafes
- Safety Signage---Factories and Hospitals

Device Selection Guide:

Part No.	Emitting Color	Polarity		
KWM-44571AVB	Red	Common Row Anode		
KWM-44571CVB	Red	Common Row Cathode		




Luckylight

1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Package Dimension:

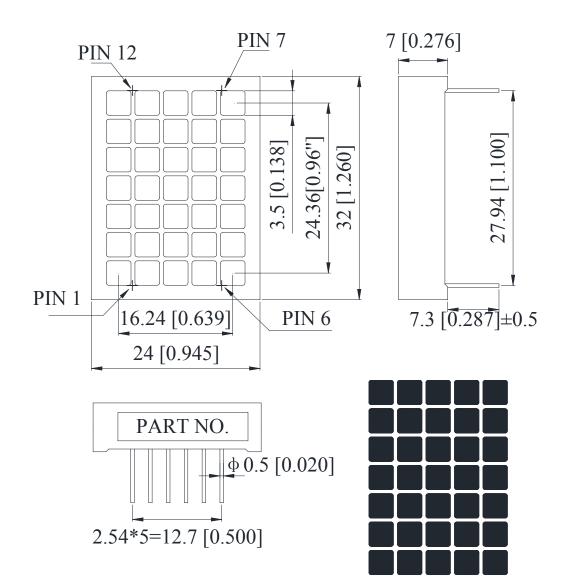

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is \pm 0.25 mm (.010") unless otherwise noted.

Spec No.: W4457AB Issue No.: G-001-Rev-3 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved Date: 16-Mar-2017 E-mail: sales@luckylight.cn http:// www.luckylight.cn Page: 2 / 10



1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display


Technical Data Sheet

Internal Circuit Diagram:

C ROW.	OL. PIN	1	2 ③	3 10	4	5
	PIN	\rightarrow	\rightarrow			
1	12 -	<u> </u>	<u> </u>			<u></u>
2	11 -	<u> </u>				Ŧ
3	(<u>2</u>) —					Ŧ
4	9-	<u> </u>	<u> </u>			Ā
5	<u>(</u> 4) –	<u> </u>				Ā
6	(5) -	<u> </u>				Ā
7	6 –					Ţ.

Common Row Anode: KWM-44571AVB

Common Row Cathode: KWM-44571CVB





1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Absolute Maximum Ratings at Ta=25°C

Symbol	Мах	Unit	
Pd	48	mW	
I _{FP}	100	mA	
IF	20	mA	
V _R	5	V	
T _{opr}	-40℃ to +80℃		
T _{stg}	-40℃ to +85℃		
T _{sld}	260° C for 5 Seconds		
	P _d I _{FP} I _F V _R T _{opr} T _{stg}	Pd 48 IFP 100 IF 20 VR 5 Topr -40°C to + Tstg -40°C to +	

Electrical Optical Characteristics at Ta=25°C

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Average Luminous Intensity	- Iv	9.0	18.0		mcd	IF=5mA (Note a)
		18.0	35.0		mcd	IF=10mA (Note a)
		35.0	70.0		mcd	IF=20mA (Note a)
Luminous Intensity Matching Ratio	I _{v-m}			2:1		IF=10mA
Peak Emission Wavelength	λр		632		nm	IF=20mA
Dominant Wavelength	λd		624		nm	IF=20mA (Note b)
Spectral Line Half-Width	$ riangle \lambda$		20		nm	IF=20mA
Forward Voltage Per Dot	VF		2.0	2.4	V	IF=20mA
Reverse Current Per Dot	I _R			50	μA	VR=5V

Notes:


- a. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- b. The dominant wavelength (λ d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.





1.2 inch (32.0mm), Red3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet


Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)









Luminous Intensity & Forward Current








Spec No.: W4457AB Issue No.: G-001-Rev-3 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved Date: 16-Mar-2017 E-mail: sales@luckylight.cn http:// www.luckylight.cn Page: 5 / 10



1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Packing & Label Specifications:

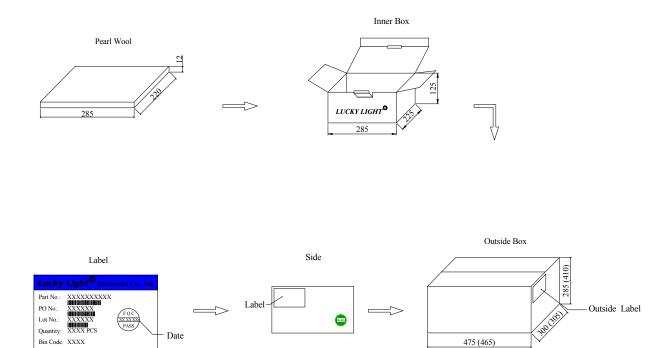

Spec No.: W4457AB	Date:	16-Mar-2017
Issue No.: G-001-Rev-3	E-mail:	sales@luckylight.cn
Luckylight Electronics Co., Ltd	http://	www.luckylight.cn
Copyright © 2017 Luckylight All Rights Reserved	Page:	6 / 10



1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Terms and conditions for the usage of this document:

- a. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- b. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- c. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Luckylight will not be responsible for any subsequent issues.
- d. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Luckylight representative for further assistance.
- e. The contents and information of this document may not be reproduced or re-transmitted without permission by Luckylight.
- f. Over-current-proof
- Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
- g. Storage
- 1. Before opening the package, the LEDs should be kept at 30 $^\circ\!\mathrm{Cor}$ less and 80%RH or less.
- 2. The LEDs should be used within a year.
- 3. After opening the package, the LEDs should be kept at 30°Cor less and 60%RH or less.

Luckylight


1.2 inch (32.0mm), Red3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Through Hole Display Mounting Method

Lead Forming:

- 1. Do not bend the component leads by hand without proper tools.
- 2. The leads should be bent by clinching the upper part of the lead firmly such that the bending force Is not exerted on the plastic body.

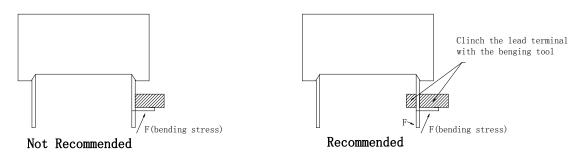


Installation:

- 1. The installation process should not apply stress to the lead terminals.
- 2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.



3. The component shall be placed at least 5mm from edge of PCB to avoid damage caused excessive heat during wave soldering.

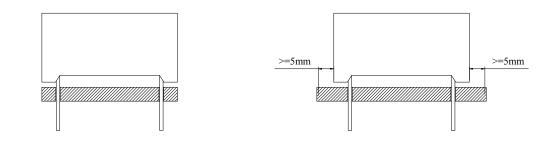


Spec No.: W4457AB Issue No.: G-001-Rev-3 Luckylight Electronics Co., Ltd Copyright © 2017 Luckylight All Rights Reserved Date: 16-Mar-2017 E-mail: sales@luckylight.cn http:// www.luckylight.cn Page: 8 / 10



1.2 inch (32.0mm), Red

3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

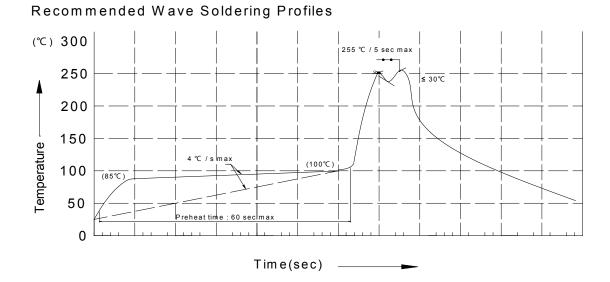

Notes:

- 1. Recommend pre-heat temperature of 105° or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260° .
- 2. Peak wave soldering temperature between 245 $^\circ\!\mathrm{C}\!\sim\!255\,^\circ\!\mathrm{C}$ for 3 sec (5 sec max).
- 3. Do not apply stress to the epoxy resin while the temperature is above 85° C.
- 4. Fixtures should not incur stress on the component when mounting and during soldering process.
- 5. SAC 305 solder alloy is recommended.
- 6. No more than one wave soldering pass.
- 7. During wave soldering, the PCB top-surface temperature should be kept below 105° C.

Soldering General Notes:

- 1. Through-hole displays are incompatible with reflow soldering.
- 2. If components will undergo multiple soldering processes, or other processes where the omponents may be subjected to intense heat, please check with luckylight for compatibility.

Luckylight

1.2 inch (32.0mm), Red 3.5×3.5mm 5×7 Dot Matrix LED Display

Technical Data Sheet

Cleaning:


- 1. Mild "no-clean" fluxes are recommended for use in soldering.
- 2. If cleaning is required, luckylight recommends to wash components with water only.


Do not use harsh organic solvents for cleaning because they may damage the plastic parts.

- 3. The cleaning process should take place at room temperature and the devices should not be washed for more than one minute.
- 4. When water is used in the cleaning process, immediately remove excess moisture from the component with forced-air drying afterwards.

Circuit Design Notes:

- 1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
- 2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.





- 3. The driving circuit should be designed to protect the LED against reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
- 4. The safe operating current should be chosen after considering the maximum ambient temperature of the operating environment.
- 5. Prolonged reverse bias should be avoided, as it could cause metal migration, leading to an increase in leakage current or causing a short circuit.